

# Robust Multilingual Named Entity Recognition with Shallow Semi-Supervised Features

Rodrigo Agerri<sup>a,\*</sup>, German Rigau<sup>a</sup>

<sup>a</sup>*IXA NLP Group, University of the Basque Country (UPV/EHU), Donostia-San Sebastián, Spain*

---

## Abstract

We present a multilingual Named Entity Recognition approach based on a robust and general set of features across languages and datasets. Our system combines shallow local information with clustering semi-supervised features induced on large amounts of unlabeled text. Understanding via empirical experimentation how to effectively *combine* various types of *clustering features* allows us to seamlessly export our system to other datasets and languages. The result is a simple but highly competitive system which obtains state of the art results across five languages and twelve datasets. The results are reported on standard shared task evaluation data such as CoNLL for English, Spanish and Dutch. Furthermore, and despite the lack of linguistically motivated features, we also report best results for languages such as Basque and German. In addition, we demonstrate that our method also obtains very competitive results even when the amount of supervised data is cut by half, alleviating the dependency on manually annotated data. Finally, the results show that our emphasis on clustering features is crucial to develop robust out-of-domain models. The system and models are freely available to facilitate its use and guarantee the reproducibility of results.

*Keywords:* Named Entity Recognition, Information Extraction, Clustering, Semi-supervised learning, Natural Language Processing

---

## 1. Introduction

A named entity can be mentioned using a great variety of surface forms (Barack Obama, President Obama, Mr. Obama, B. Obama, etc.) and the same surface form can refer to a variety of named entities. For example, according to the English Wikipedia,

---

<sup>1</sup>Please cite this paper as: R. Agerri, G. Rigau. Robust multilingual Named Entity Recognition with shallow semi-supervised features, Artificial Intelligence (2016). <http://dx.doi.org/10.1016/j.artint.2016.05.003>. ©2016. This manuscript version is made available under the CC-BY-NC-ND 4.0 license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

\*Corresponding author

*Email addresses:* [rodrigo.agerri@ehu.eus](mailto:rodrigo.agerri@ehu.eus) (Rodrigo Agerri), [german.rigau@ehu.eus](mailto:german.rigau@ehu.eus) (German Rigau)

*Preprint submitted to Artificial Intelligence Journal*

*May 24, 2016*

5 the form ‘Europe’ can ambiguously be used to refer to 18 different entities, including  
the continent, the European Union, various Greek mythological entities, a rock band,  
some music albums, a magazine, a short story, etc.<sup>2</sup> Furthermore, it is possible to refer  
to a named entity by means of anaphoric pronouns and co-referent expressions such as  
‘he’, ‘her’, ‘their’, ‘I’, ‘the 35 year old’, etc. Therefore, in order to provide an adequate  
10 and comprehensive account of named entities in text it is necessary to *recognize* the  
mention of a named entity and to *classify* it by a pre-defined type (e.g, person, location,  
organization). Named Entity Recognition and Classification (NERC) is usually a required  
step to perform Named Entity Disambiguation (NED), namely to link ‘Europe’ to the  
right Wikipedia article, and to resolve every form of mentioning or co-referring to the  
15 same entity.

Nowadays NERC systems are widely being used in research for tasks such as Coreference  
Resolution (Pradhan et al., 2012), Named Entity Disambiguation (Cucerzan, 2007;  
Han and Sun, 2011; Hoffart et al., 2011; Mendes et al., 2011; Hachey et al., 2013) for  
which a lot of interest has been created by the TAC KBP shared tasks (Ji and Grishman,  
20 2011), Machine Translation (Al-Onaizan and Knight, 2002; Koehn et al., 2007; Babych  
and Hartley, 2003; Li et al., 2013), Aspect Based Sentiment Analysis (Liu, 2012; Cambria  
et al., 2013; Pontiki et al., 2014, 2015), Event Extraction (Doddington et al., 2004; Ahn,  
2006; Ji and Grishman, 2008; Cybulska and Vossen, 2013; Hong et al., 2011) and Event  
Ordering (Minard et al., 2015).

25 Moreover, NERC systems are integrated in the processing chain of many industrial  
software applications, mostly by companies offering specific solutions for a particular  
industrial sector which require recognizing named entities specific of their domain. There  
is therefore a clear interest in both academic research and industry to develop robust and  
efficient NERC systems: For industrial vendors it is particularly important to diversify  
30 their services by including NLP technology for a variety of languages whereas in academic  
research NERC is one of the foundations of many other NLP end-tasks.

Most NERC taggers are supervised statistical systems that extract patterns and term  
features which are considered to be indications of Named Entity (NE) types using the  
manually annotated training data (extracting orthographic, linguistic and other types of  
35 evidence) and often external knowledge resources. As in other NLP tasks, supervised  
statistical NERC systems are more robust and obtain better performance on available  
evaluation sets, although sometimes the statistical models can also be combined with  
specific rules for some NE types. For best performance, supervised statistical approaches  
require manually annotated training data, which is both expensive and time-consuming.  
40 This has seriously hindered the development of robust high performing NERC systems  
for many languages but also for other domains and text genres (Nobata et al., 2000;  
Ritter et al., 2011), in what we will henceforth call ‘out-of-domain’ evaluations.

Moreover, supervised NERC systems often require fine-tuning for each language and,  
as some of the features require language-specific knowledge, this poses yet an extra com-  
45 plication for the development of robust multilingual NERC systems. For example, it  
is well-known that in German every noun is capitalized and that compounds includ-  
ing named entities are pervasive. This also applies to agglutinative languages such as  
Basque, Korean, Finnish, Japanese, Hungarian or Turkish. For this type of languages, it

---

<sup>2</sup>[http://en.wikipedia.org/wiki/Europe\\_\(disambiguation\)](http://en.wikipedia.org/wiki/Europe_(disambiguation))

had usually been assumed that linguistic features (typically Part of Speech (POS) and lemmas, but also semantic features based on WordNet, for example) and perhaps specific hand-crafted rules, were a necessary condition for good NERC performance as they would allow to capture better the most recurrent declensions (cases) of named entities for Basque (Alegria et al., 2006) or to address problems such as sparsity and capitalization of every noun for German (Faruqui et al., 2010; Benikova et al., 2014, 2015). This language dependency was easy to see in the CoNLL 2002 and 2003 tasks, in which systems participating in the two available languages for each edition obtained in general different results for each language. This suggests that without fine-tuning for each corpus and language, the systems did not generalize well across languages (Nothman et al., 2013).

This paper presents a multilingual and robust NERC system based on simple, general and shallow features that heavily relies on word representation features for high performance. Even though we do not use linguistic motivated features, our approach also works well for inflected languages such as Basque and German. We demonstrate the robustness of our approach by reporting best results for five languages (Basque, Dutch, German, English and Spanish) on 12 different datasets, including seven in-domain and eight out-of-domain evaluations.

### 1.1. Contributions

The main contributions of this paper are the following: First, we show how to easily develop robust NERC systems across datasets and languages with minimal human intervention, even for languages with declension and/or complex morphology. Second, we empirically show how to effectively use various types of simple word representation features thereby providing a clear methodology for choosing and combining them. Third, we demonstrate that our system still obtains very competitive results even when the supervised data is reduced by half (even less in some cases), alleviating the dependency on costly hand annotated data. These three main contributions are based on:

1. A simple and shallow robust set of features across languages and datasets, even in out-of-domain evaluations.
2. The lack of linguistic motivated features, even for languages with agglutinative (e.g., Basque) and/or complex morphology (e.g., German).
3. A clear methodology for using and combining various types of word representation features by leveraging public unlabeled data.

Our approach consists of shallow local features complemented by three types of word representation (clustering) features: Brown clusters (Brown et al., 1992), Clark clusters (Clark, 2003) and K-means clusters on top of the word vectors obtained by using the Skip-gram algorithm (Mikolov et al., 2013). We demonstrate that *combining* and *stacking* different clustering features induced from various data sources (Reuters, Wikipedia, Gigaword, etc.) allows to cover different and more varied types of named entities without manual feature tuning. Even though our approach is much simpler than most, we obtain the best results for Dutch, Spanish and English and comparable results in German (on CoNLL 2002 and 2003). We also report best results for German using the GermEval 2014 shared task data and for Basque using the Egunkaria testset (Alegria et al., 2006).

We report out-of-domain evaluations in three languages (Dutch, English and Spanish) using four different datasets to compare our system with the best publicly available

systems for those languages: Illinois NER (Ratinov and Roth, 2009) for English, Stanford NER (Finkel et al., 2005) for English and Spanish, SONAR-1 NERD for Dutch  
95 (Desmet and Hoste, 2014) and Freeling for Spanish (Padró and Stanilovsky, 2012). We outperform every other system in the eight out-of-domain evaluations reported in Section 4.3. Furthermore, the out-of-domain results show that our clustering features provide a simple and easy method to improve the robustness of NERC systems.

Finally, and inspired by previous work (Koo et al., 2008; Biemann, 2009) we measure  
100 how much supervision is required to obtain state of the art results. In Section 4.2 we show that we can still obtain very competitive results reducing the supervised data by half (and sometimes even more). This, together with the lack of linguistic features, means that our system considerably saves data annotation costs, which is quite convenient when trying to develop a NERC system for a new language and/or domain.

105 Our system learns Perceptron models (Collins, 2002) using the Machine Learning machinery provided by the Apache OpenNLP project<sup>3</sup> with our own customized (local and clustering) features. Our NERC system is publicly available and distributed under the Apache 2.0 License and part of the IXA pipes tools (Agerri et al., 2014). Every result reported in this paper is obtained using the conllevl script from the CoNLL 2002 and  
110 CoNLL 2003 shared tasks<sup>4</sup>. To guarantee reproducibility of results we also make publicly available the models and the scripts used to perform the evaluations. The system, models and evaluation scripts can be found in the *ixa-pipe-nerc* website<sup>5</sup>.

Next Section reviews related work, focusing on best performing NERC systems for each language evaluated on standard shared evaluation task data. Section 3 presents  
115 the design of our system and our overall approach to NERC. In Section 4 we report the evaluation results obtained by our system for 5 languages (Basque, Dutch, German, English and Spanish) on 12 different datasets, distributed in 7 in-domain and 8 out-of-domain evaluations. Section 5 discusses the results and contributions of our approach. In Section 6 we highlight the main aspects of our work providing some concluding remarks and future work to be done using our NERC approach applied to other text genres,  
120 domains and sequence labeling tasks.

## 2. Related Work

The Named Entity Recognition and Classification (NERC) task was first defined for the Sixth Message Understanding Conference (MUC 6) (Nadeau and Sekine, 2007). The  
125 MUC 6 tasks focused on Information Extraction (IE) from unstructured text and NERC was deemed to be an important IE sub-task with the aim of recognizing and classifying nominal mentions of persons, organizations and locations, and also numeric expressions of dates, money, percentage and time. In the following years, research on NERC increased as it was considered to be a crucial source of information for other Natural  
130 Language Processing tasks such as Question Answering (QA) and Textual Entailment (RTE) (Nadeau and Sekine, 2007). Furthermore, while MUC 6 was solely devoted to English as target language, the CoNLL shared tasks (2002 and 2003) boosted research

---

<sup>3</sup><http://opennlp.apache.org/>

<sup>4</sup><http://www.cnts.ua.ac.be/conll2002/ner/bin/conllevl.txt>

<sup>5</sup><https://github.com/ixa-ehu/ixa-pipe-nerc>

on language independent NERC for 3 additional target languages: Dutch, German and Spanish (Tjong Kim Sang, 2002; Tjong Kim Sang and De Meulder, 2003).

135 The various MUC, ACE and CoNLL evaluations provided a very convenient framework to test and compare NERC systems, algorithms and approaches. They provided manually annotated data for training and testing the systems as well as an objective evaluation methodology. Using such framework, research rapidly evolved from rule-based approaches (consisting of manually handcrafted rules) to language independent systems  
140 focused on learning supervised statistical models. Thus, while in the MUC 6 competition 5 out of 8 systems were rule-based, in CoNLL 2003 16 teams participated in the English task all using statistical-based NERC (Nadeau and Sekine, 2007).

### 2.1. Datasets

145 Table 1 describes the 12 datasets used in this paper. The first half lists the corpora used for in-domain evaluation whereas the lower half contains the out-of-domain datasets. The CoNLL NER shared tasks focused on language independent machine learning approaches for 4 entity types: *person*, *location*, *organization* and *miscellaneous* entities. The 2002 edition provided manually annotated data in Dutch and Spanish whereas in 2003 the languages were German and English. In addition to the CoNLL data, for English  
150 we also use the formal run of MUC 7 and Wikigold for out-of-domain evaluation. Very detailed descriptions of CoNLL and MUC data can easily be found in the literature, including the shared task descriptions themselves (Chinchor and Marsh, 1998; Tjong Kim Sang, 2002; Tjong Kim Sang and De Meulder, 2003), so in the following we will describe the remaining, newer datasets.

Corpus	Source	Number of Tokens and Named Entities						
		train		dev		test		
		tok	ne	tok	ne	tok	ne	
In-domain datasets								
en	CoNLL 2003	Reuters RCV1	203621	23499	51362	5942	46435	5648
de	CoNLL 2003	Frankfurter Rundschau 1992	206931	11851	51444	4833	51943	3673
	GermEval 2014	Wikipedia/LCC news	452853	31545	41653	2886	96499	6893
es	CoNLL 2002	EFE 2000	264715	18798	52923	4352	51533	3558
nl	CoNLL 2002	De Morgen 2000	199069	13344	36908	2616	67473	3941
eu	Egunkaria	Egunkaria 1999-2003	44408	3817			15351	931
Out-of-domain datasets								
en	MUC7	newswire					53749	3514
	Wikigold	Wikipedia 2008					39007	3558
	MEANTIME	Wikinews 2013					13957	1432
nl	SONAR-1	various genres					1000000	62505
	MEANTIME	Wikinews 2013					13425	1545
es	Ancora 2.0	newswire	547198	36938				
	MEANTIME	Wikinews 2013	15853	1706				

Table 1: Datasets used for training, development and evaluation. MUC7: only three classes (LOC, ORG, PER) of the formal run are used for out-of-domain evaluation. As there are not standard partitions of SONAR-1 and Ancora 2.0, the full corpus was used for training and later evaluated in-out-of-domain settings.

155 The Wikigold corpus consists of 39K words of English Wikipedia manually annotated following the CoNLL 2003 guidelines (Nothman et al., 2013). For Spanish and Dutch, we also use Ancora 2.0 (Taulé et al., 2008) and SONAR-1 (Desmet and Hoste, 2014)

respectively. SONAR-1 is a one million word Dutch corpus with both coarse-grained and fine-grained named entity annotations. The coarse-grained level includes *product* and *event* entity types in addition to the four types defined in CoNLL data. Ancora adds *date* and *number* types to the CoNLL four main types. In Basque the only gold standard corpus is Egunkaria (Alegria et al., 2006). Although the Basque Egunkaria dataset is annotated with four entity types, the *miscellaneous* class is extremely sparse, occurring only in a proportion of 1 to 10. Thus, in the training data there are 156 entities annotated as MISC whereas each of the other three classes contain around 1200 entities.

In the datasets described so far, named entities were assumed to be non-recursive and non-overlapping. During the annotation process, if a named entity was embedded in a longer one, then only the longest mention was annotated. The exceptions are the GermEval 2014 shared task data for German and MEANTIME, where nested entities are also annotated (both inner and outer spans).

The GermEval 2014 NER shared task (Benikova et al., 2014) aimed at improving the state of the art of German NERC which was perceived to be comparatively lower than the English NERC. Two main extensions were introduced in GermEval 2014; (i) fine grained named entity sub-types to indicate *derivations* and *compounds*; (ii) embedded entities (and not only the longest span) are annotated. In total, there are 12 types for classification: *person*, *location*, *organization*, *other* plus their sub-types annotated at their inner and outer levels.

Finally, the MEANTIME corpus (Minard et al., 2016) is a multilingual (Dutch, English, Italian and Spanish) publicly available evaluation set annotated within the Newsreader project<sup>6</sup>. It consists of 120 documents, divided into 4 topics: Apple Inc., Airbus and Boeing, General Motors, Chrysler and Ford, and the stock market. The articles are selected in such a way that the corpus contains different articles that deal with the same topic over time (e.g. launch of a new product, discussion of the same financial indexes). Moreover, it contains nested entities so the evaluation results will be provided in terms of the outer and the inner spans of the named entities. MEANTIME includes six named entity types: *person*, *location*, *organization*, *product*, *financial* and *mixed*.

## 2.2. Related Approaches

Named entity recognition is a task with a long history in NLP. Therefore, we will summarize those approaches that are most relevant to our work, especially those we will directly compared with in Section 4. Since CoNLL shared tasks, the most competitive approaches have been supervised systems learning CRF, SVM, Maximum Entropy or Averaged Perceptron models. In any case, while the machine learning method is important, it has also been demonstrated that good performance might largely be due to the feature set used (Clark and Curran, 2003). Table 2 provides an overview of the features used by previous best scoring approaches for each of the five languages we address in this paper.

Traditionally, local features have included contextual and orthographic information, affixes, character-based features, prediction history, etc. As argued by the CoNLL 2003 organizers, no feature set was deemed to be ideal for NERC (Tjong Kim Sang and De Meulder, 2003), although many approaches for English refer to Zhang and Johnson (2003) as a useful general approach.

---

<sup>6</sup><http://www.newsreader-project.eu>

System	Local	Ling	Global	Gaz	WR	Rules	Ensemble	Public	Res
Ratinov and Roth 2009	✓		✓	✓	✓			✓	✓
Passos et al. 2014	✓			✓	✓		✓		
ExB	✓	✓		✓	✓	✓	✓		
Faruqui et al. 2010	✓	✓	✓		✓			✓	
Carreras et al. 2002	✓	✓	✓	✓				✓	✓
Clark and Curran 2003	✓	✓		✓				✓	✓
Sonar nerd	✓	✓		✓		✓	✓	✓	✓
Alegria et al. 2006	✓	✓		✓		✓	✓		
ixa-pipe-nerc	✓			✓	✓			✓	✓

Table 2: Features of best previous in-domain results. Local: shallow local features including capitalization, word shape, etc.; Ling: linguistic features such as POS, lemma, chunks and semantic information from Wordnet; Global: global features; Gaz: gazetteers; WR: word representation features; Rules: manually encoded rules; Ensemble: stack of classifiers or ensemble system; Public: if the system is publicly distributed. Res: If any external resources used are publicly distributed to allow re-training.

*Linguistic Information.* Some of the CoNLL participants use linguistic information (POS, lemmas, chunks, but also specific rules or patterns) for Dutch and English (Carreras et al., 2002; Clark and Curran, 2003), although these type of features was deemed to be most important for German, for which the use of linguistic features is pervasive (Benikova et al., 2014). This is caused by the sparsity caused by the declension cases, the tendency to form compounds containing named entities and by the capitalization of every noun (Faruqui et al., 2010). For example, the best system among the 11 participants in GermEval 2014, ExB, uses morphological features and specific suffix lists aimed at capturing frequent patterns in the endings of named entities (Hänig et al., 2014).

In agglutinative languages such as Basque, which contains declension cases for named entities, linguistic features are considered to be a requirement. For example, the country name ‘Espainia’ (Spain in Basque) can occur in several forms, *Espainian*, *Espainiera*, *Espainiak*, *Espainiarentzat*, *Espainiako*, and many more.<sup>7</sup> Linguistic information has been used to treat this phenomenon. The only previous work for Basque developed Eihera, a rule-based NERC system formalized as finite state transducers to take into account declension classes (Alegria et al., 2006). The features of Eihera include word, lemma, POS, declension case, capitalized lemma, etc. These features are complemented with gazetteers extracted from the *Euskaldunon Egunkaria* newspaper and semantic information from the Basque WordNet.

*Gazetteers.* Dictionaries are widely used to inject world knowledge via gazetteer matches as features in machine learning approaches to NERC. The best performing systems carefully compile their own gazetteers from a variety of sources (Carreras et al., 2002). Ratinov and Roth (2009) leverage a collection of 30 gazetteers and matches against each one are weighted as a separate feature. In this way they trust each gazetteer to a different degree. Passos et al. (2014) carefully compiled a large collection of English gazetteers extracted from US Census data and Wikipedia and applied them to the process of inducing word embeddings with very good results.

While it is possible to automatically extract them from various corpora or resources, they still require careful manual inspection of the target data. Thus, our approach only

<sup>7</sup>English: in Spain, to Spain, Spain (in transitive clause), for Spain, in Spain.

uses off the shelf gazetteers whenever they are publicly available. Furthermore, our method collapses every gazetteer into one dictionary. This means that we only add a feature per token, instead of a feature per token and gazetteer.

*Global Features.* The intuition behind non-local (or global) features is to treat similarly all occurrences of the same named entity in a text. Carreras et al. (2002) proposed a method to produce the set of named entities for the whole sentence, where the optimal set of named entities for the sentence is the coherent set of named entities which maximizes the summation of confidences of the named entities in the set. Ratinov and Roth (2009) developed three types of non-local features, analyzing global dependencies in a window of between 200 and 1000 tokens.

*Word representations.* Semi-supervised approaches leveraging unlabeled text had already been applied to improve results in various NLP tasks. More specifically, it had been previously shown how to apply Brown clusters (Brown et al., 1992) for Chinese Word Segmentation (Liang, 2005), dependency parsing (Koo et al., 2008), NERC (Suzuki and Isozaki, 2008) and POS tagging (Biemann, 2009).

Ratinov and Roth (2009) used Brown clusters as features obtaining what was at the time the best published result of an English NERC system on the CoNLL 2003 testset. Turian et al. (2010) made a rather exhaustive comparison of Brown clusters, Collobert and Weston’s embeddings (Collobert and Weston, 2008) and HLBL embeddings (Mnih and Hinton, 2007) to improve chunking and NERC. They show that in some cases the combination of word representation features was positive but, although they used Ratinov and Roth’s (2009) system as starting point, they did not manage to improve over the state of the art. Furthermore, they reported that Brown clustering features performed better than the word embeddings.

Passos et al. (2014) extend the Skip-gram algorithm to learn 50-dimensional lexicon infused phrase embeddings from 22 different gazetteers and the Wikipedia. The resulting embeddings are used as features by scaling them by a hyper-parameter which is a real number tuned on the development data. Passos et al. (2014) report best results up to date for English NERC on CoNLL 2003 test data, 90.90 F1.

The best German CoNLL 2003 system (an ensemble) was outperformed by Faruqui et al. (2010). They trained the Stanford NER system (Finkel et al., 2005), which uses a linear-chain Conditional Random Field (CRF) with a variety of features, including lemma, POS tag, etc. Crucially, they included “distributional similarity” features in the form of Clark clusters (Clark, 2003) induced from large unlabeled corpora: the Huge German Corpus (HGC) of around 175M tokens of newspaper text and the deWac corpus (Baroni et al., 2009) consisting of 1.71B tokens of web-crawled data. Using the clusters induced from deWac as a form of *semi-supervision* improved the results over the best CoNLL 2003 system by 4 points in F1.

*Ensemble Systems.* The best participant of the English CoNLL 2003 shared task used the results of two externally trained NERC taggers to create an ensemble system (Florian et al., 2003). Passos et al. (2014) develop a stacked linear-chain CRF system: they train two CRFs with roughly the same features; the second CRF can condition on the predictions made by the first CRF. Their “baseline” system uses a similar local featureset as Ratinov and Roth’s (2009) but complemented with gazetteers. Their baseline system



275 combined with their phrase embeddings trained with infused lexicons allow them to report the best CoNLL 2003 result so far.

The best system of the GermEval 2014 task built an ensemble of classifiers and pattern extractors to find the most likely tag sequence (Hänig et al., 2014). They paid special attention to out of vocabulary words which are addressed by semi-supervised  
280 word representation features and an ensemble of POS taggers. Furthermore, remaining unknown candidate mentions are tackled by look-up via the Wikipedia API.

Apart from the feature types, the last two columns of Table 2 refer to whether the systems are publicly available and whether any external resources used for training are made available (e.g., induced word embeddings, gazetteers or corpora). This is desirable  
285 to be able to re-train the systems on different datasets. For example, we would have been interested in training the Stanford NER system with the full Ancora corpus for the evaluation presented in Table 16, but their Spanish cluster lexicon is not available. Alternatively, we would have liked to train our system with the same Ancora partition used to train Stanford NER, but that is not available either.

### 290 3. System Description

The design of *ixa-pipe-nerc* aims at establishing a simple and shallow feature set, avoiding any linguistic motivated features, with the objective of removing any reliance on costly extra gold annotations (POS tags, lemmas, syntax, semantics) and/or cascading errors if automatic language processors are used. The underlying motivation is to obtain  
295 robust models to facilitate the development of NERC systems for other languages and datasets/domains while obtaining state of the art results. Our system consists of:

- Local, shallow features based mostly on orthographic, word shape and n-gram features plus their context.
- Three types of simple clustering features, based on unigram matching.
- 300 • Publicly available gazetteers, widely used in previous NERC systems (Tjong Kim Sang and De Meulder, 2003; Nadeau and Sekine, 2007).

Table 3 provides an example of the features generated by our system<sup>8</sup>.

#### 3.1. Local Features

305 The local features constitute our baseline system on top of which the clustering features are added. We implement the following feature set, partially inspired by previous work (Zhang and Johnson, 2003):

- Token: Current lowercase token ( $w$ ), namely, *ekudorko* in Table 3.
- Token Shape: Current lowercase token ( $w$ ) *plus* current token shape ( $wc$ ), where token shape consist of: (i) The token is either lowercase or a 2 digit word or a 4  
310 digit word; (ii) If the token contains digits, then whether it also contains letters,

---

<sup>8</sup>To avoid too much repetition, Brown, Trigram and character n-gram features have been abbreviated.

Feature	$w_{i-2}$	$w_{i-1}$	$w_i$	$w_{i+1}$	$w_{i+2}$
Token	w=1994an	w=,	w=ekudorko	w=hiriburuan	w=,
Token Shape	wc=1994an,4d	wc=,,other	wc=ekudorko,ic	wc=hiriburuan,lc	wc=,,other
Previous Pred	pd=null	pd=other	pd=null	pd=null	pd=other
Brown Token	bt=0111 bt=011111		bt=0010 bt=001001	bt=0101 bt=010110	
Brown Token,Class	c,bt=4d,0111 c,bt=4d,011111		c,bt=ic,0010 c,bt=ic,001001	c,bt=lc,0101 c,bt=lc,010111	
Clark-a	ca=158	ca=O	ca=175	ca=184	ca=O
Clark-b	cb=149	cb=O	cb=176	cb=104	cb=O
Word2vec-a	w2va=55	w2va=O	w2va=14	w2va=14	w2va=O
Word2vec-b	w2vb=524	w2vb=O	w2vb=464	w2vb=139	w2vb=O
Prefix( $w_i$ )	pre=Eku; pre=Ekua				
Suffix( $w_i$ )	suf=o; suf=ko; suf=rko; suf=orko				
Bigram( $w_i$ )	pw,w=,,Ekuadorko; pwc,wc=other,ic; w,nw=Ekuadorko,hiriburuan; wc,nc=ic,lc				
Trigram( $w_i$ )	ppw,pw,w=1994an,,Ekuadorko; ppwc,pwc,wc=4d,other,ic; ...				
char n-grams( $w_i$ )	ng=adorko; ng=rko; ng=dorko; ng=ko; ng=orko ...				

Table 3: Features generated for the Basque sentence “Morras munduko txapeldun izan zen juniorretan 1994an, Ekuadorko hiriburuan, Quito”. English: Morras was junior world champion in 1994, in the capital of Ecuador, Quito. Current token is ‘Ekuadorko’.

or slashes, or hyphens, or commas, or periods or is numeric; (iii) The token is all uppercase letters *or* is an acronym *or* is a one letter uppercase word *or* starts with capital letter. Thus, in Table 3 *1994an* is a 4 digit word (4d), *Ekuadorko* has an initial capital shape (ic) and *hiriburuan* is lowercase (lc).

- 315 • Previous prediction: the previous outcome (pd) for the current token. The previous predictions in our example are *null* because these words have not been seen previously, except for the comma.
- Sentence: Whether the token is the beginning of the sentence. None of the tokens in our example is at the beginning of the sentence, so this feature is not active in Table 3.
- 320 • Prefix: Two prefixes consisting of the first three and four characters of the current token: *Eku* and *Ekua*.
- Suffix: The four suffixes of length one to four from the last four characters of the current token.
- 325 • Bigram: Bigrams including the current token and the token shape.
- Trigram: Trigrams including the current token and the token shape.
- Character n-gram: All lowercase character bigrams, trigrams, fourgrams and fivegrams from the current token (ng).

330 Token, token shape and previous prediction features are placed in a 5 token window, namely, for these these three features we also consider the previous and the next two words, as shown in Table 3.

### 3.2. Gazetteers

We add gazetteers to our system only if they are readily available to use, but our approach does not fundamentally depend upon them. We perform a look-up in a gazetteer to check if a named entity occurs in the sentence. The result of the look-up is represented with the same encoding chosen for the training process, namely, the BIO or BILOU scheme<sup>9</sup>. Thus, for the current token we add the following features:

1. The current named entity class in the encoding schema. Thus, in the BILOU encoding we would have “unit”, “beginning”, “last”, “inside”, or if not match is found, “outside”, combined with the specific named entity type (LOC, ORG, PER, MISC, etc.).
2. The current named entity class as above *and* the current token.

### 3.3. Clustering Features

The general idea is that by using some type of semantic similarity or word cluster induced over large unlabeled corpora it is possible to improve the predictions for unseen words in the test set. This type of semi-supervised learning may be aimed at improving performance over a fixed amount of training data or, given a fixed target performance level, to establish how much supervised data is actually required to reach such performance (Koo et al., 2008).

So far the most successful approaches have only used one type of word representation (Passos et al., 2014; Faruqui et al., 2010; Ratinov and Roth, 2009). However, our simple baseline combined with one type of word representation features are not able to compete with previous, more complex, systems. Thus, instead of encoding more elaborate features, we have devised a simple method to *combine* and *stack* various types of clustering features induced over different data sources or corpora. In principle, our method can be used with any type of word representations. However, for comparison purposes, we decided to use word representations previously used in successful NERC approaches: Brown clusters (Ratinov and Roth, 2009; Turian et al., 2010), Word2vec clusters (Passos et al., 2014) and Clark clusters (Finkel et al., 2005; Faruqui et al., 2010). As can be observed in Table 3, our clustering features are placed in a 5 token window.

#### 3.3.1. Brown Features

The Brown clustering algorithm (Brown et al., 1992) is a hierarchical algorithm which clusters words to maximize the mutual information of bigrams. Thus, it is a class-based bigram model in which:

- The probability of a document corresponds to the product of the probabilities of its bigrams,
- the probability of each bigram is calculated by multiplying the probability of a bigram model over latent classes by the probability of each class generating the actual word types in the bigram, and

---

<sup>9</sup>The BIO scheme suggests to learn models that identify the Beginning, the Inside and the Outside of sequences. The BILOU scheme proposes to learn models Beginning, the Inside and the Last tokens of multi-token chunks as well as Unit-length chunks.

- each word type has non-zero probability only on a single class.

The Brown algorithm takes a vocabulary of words to be clustered and a corpus of text containing these words. It starts by assigning each word in the vocabulary to its own separate cluster, then iteratively merges the pair of clusters which leads to the smallest decrease in the likelihood of the text corpus. This produces a hierarchical clustering of the words, which is usually represented as a binary tree, as shown in Figure 1. In this tree every word is uniquely identified by its path from the root, and the path can be represented by a bit string. It is also possible to choose different levels of word abstraction by choosing different depths along the path from the root to the word. Therefore, by using paths of various lengths, we obtain clustering features of different granularities (Miller et al., 2004).

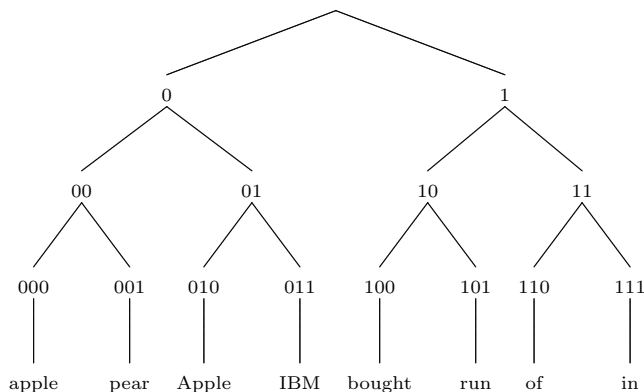


Figure 1: A Brown clustering hierarchy.

We use paths of length 4, 6, 10 and 20 as features (Ratinov and Roth, 2009). However, we introduce several novelties in the design of our Brown clustering features:

1. For each feature which is token-based, we add a feature containing the paths computed for the current token. Thus, taking into account our baseline system, we will add the following Brown clustering features:
  - (a) Brown Token: existing paths of length 4, 6, 10 and 20 for the current token.
  - (b) Brown Token Shape: existing paths of length 4, 6, 10, 20 for the current token *and* current token shape.
  - (c) Brown Bigram: existing paths of length 4, 6, 10, 20 for bigrams including the current token.
2. Brown clustering features benefit from two additional features:
  - (a) Previous prediction plus token: the previous prediction (pd) for the current token *and* the current token.
  - (b) Previous two predictions: the previous prediction for the current *and* the previous token.

For space reasons, Table 3 only shows the Brown Token (bt) and Brown Token Shape (c) features for paths of length 4 and 6. We use the publicly available tool<sup>10</sup> implemented

<sup>10</sup><https://github.com/percyliang/brown-cluster>

by Liang (2005) with default settings. The input consists of a corpus tokenized and segmented one sentence per line, without punctuation. Furthermore, we follow previous  
400 work and remove all sentences which consist of less than 90% lowercase characters (Liang, 2005; Turian et al., 2010) before inducing the Brown clusters.

### 3.3.2. Clark Features

Clark (2003) presents a number of unsupervised algorithms, based on distributional and morphological information, for clustering words into classes from unlabeled text. The  
405 focus is on clustering infrequent words on a small numbers of clusters from comparatively small amounts of data. In particular, Clark (2003) presents an algorithm combining distributional information with morphological information of words “by composing the Ney-Essen clustering model with a model for the morphology within a Bayesian frame-  
410 work”. The objective is to bias the distributional information to put words that are morphologically similar in the same cluster. We use the code released by Clark (2003) off the shelf<sup>11</sup> to induce Clark clusters using the Ney-Essen with morphological information method. The input of the algorithm is a sequence of lowercase tokens without punctuation, one token per line with sentence breaks.

Our Clark clustering features are very simple: we perform a look-up of the current  
415 token in the clustering lexicon. If a match is found, we add as a feature the clustering class, or the lack of match if the token is not found (see Clark-a and Clark-b in Table 3).

### 3.3.3. Word2vec Features

Another family of language models that produces word representations are the neural language models. These approaches produce representation of words as continuous vectors (Collobert and Weston, 2008; Mnih and Hinton, 2007), also called *word embeddings*.  
420 Nowadays, perhaps the most popular among them is the Skip-gram algorithm (Mikolov et al., 2013). The Skip-gram algorithm uses shallow log-linear models to compute vector representation of words which are more efficient than previous word representations induced on neural language models. Their objective is to produce word embeddings by  
425 computing the probability of each n-gram as the product of the conditional probabilities of each context word in the n-gram conditioned on its central word (Mikolov et al., 2013).

Instead of using continuous vectors as real numbers, we induce clusters or word classes from the word vectors by applying K-means clustering. In this way we can use the cluster classes as simple binary features by injecting unigram match features. We use  
430 the Word2vec tool<sup>12</sup> released by Mikolov et al. (2013) with a 5 window context to train 50-dimensional word embeddings and to obtain the word clusters on top of them. The input of the algorithm is a corpus tokenized, lowercased, with punctuation removed and in one line. The Word2vec features are implemented exactly like the Clark features.

### 3.3.4. Stacking and Combining Clustering Features

We successfully combine clustering features from different word representations. Fur-  
435 thermore, we also *stack* or *accumulate* features of the same type of word representation induced from different data sources, trusting each clustering lexicon to a different degree,

---

<sup>11</sup>[https://github.com/ninjin/clark\\_pos\\_induction](https://github.com/ninjin/clark_pos_induction)

<sup>12</sup><https://code.google.com/p/Word2vec/>

as shown by the five encoded clustering features in Table 3: two Clark and Word2vec features from different source data and one Brown feature. When using word representations as semi-supervised features for a task like NERC, two principal factors need to be taken into account: (i) the source data or corpus used to induce the word representations and (ii) the actual word representation used to encode our features which in turn modify the weight of our model’s parameters in the training process.

For the clustering features to be effective the induced clusters need to contain as many words appearing in the training, development and test sets as possible. This can be achieved by using corpora closely related to the text genre or domain of the data sets or by using very large unlabeled corpora which, although not closely domain-related, be large enough to include many relevant words. For example, with respect to the CoNLL 2003 English dataset an example of the former would be the Reuters corpus while the Wikipedia would be an example of the latter.

The word representations obtained by different algorithms would capture different distributional properties of words in a given corpus or data source. Therefore, each type of clustering would allow us to capture different types of occurring named entity types. In other words, *combining* and *stacking* different types of clustering features induced over a variety of data sources should help to capture more similarities between different words in the training and test sets, increasing the contribution to the weights of the model parameters in the training process.

#### 4. Experimental Results

In this Section we report on the experiments performed with the *ixa-pipe-nerc* system as described in the previous section. The experiments are performed in 5 languages: Basque, Dutch, English, German and Spanish. For comparison purposes, in-domain results are presented in Section 4.1 using the most common NERC datasets for each language as summarized in Table 1. Section 4.2 analyzes the performance when reducing training data and Section 4.3 presents eight out-of-domain evaluations for three languages: Dutch, English and Spanish.

		million words in corpus	million words for training		
			Brown	Clark	Word2vec
en	Reuters RCV1	63	35	63	63
	Wikipedia (20141208)	1700	790	790	1700
	Gigaword 5th ed.	4000	-	-	4000
de	Wikipedia (20140725)	650	190	190	650
	deWac (Baroni et al., 2009)	1100	500	500	1100
es	Wikipedia (20140810)	428	246	246	428
	elperiodico (1998-2002)	60	35	60	60
	Gigaword 3rd ed.	1150	330 (afp)	330 (afp)	1150
nl	Wikipedia (20140804)	235	128	128	235
	Wikipedia (20141208)	60	12	60	60
eu	Egunkaria (1999-2003)	38	28	38	38
	Berria (2003-2014)	90	78	90	90

Table 4: Unlabeled corpora used to induced clusters. For each corpus and cluster type the number of words (in millions) is specified. Average training times: depending on the number of words, Brown clusters training time required between 5h and 48h. Word2vec required 1-4 hours whereas Clark clusters training lasted between 5 hours and 10 days.

The results for Dutch, English and Spanish do not include trigrams and character n-grams in the local featureset described in Section 3.1, except for the models in each in-domain evaluation which are marked with “charngram 1:6”.

We also experiment with dictionary features but, in contrast to previous approaches such as Passos et al. (2014), we only use currently available gazetteers off-the-shelf. For every model marked with “dict” we use the thirty English Illinois NER gazetteers (Ratinov and Roth, 2009), irrespective of the target language. Additionally, the English models use six gazetteers about the Global Automotive Industry provided by LexisNexis to the Newsreader project<sup>13</sup>, whereas the German models include, in addition to the Illinois gazetteers, the German dictionaries distributed in the CoNLL 2003 shared task. The gazetteers are collapsed into one large dictionary and deployed as described in Section 3.2.

Finally, the clustering features are obtained by processing the following clusters from publicly available corpora: (i) 1000 Brown clusters; (ii) Clark and Word2vec clusters in the 100-600 range. To choose the best combination of clustering features we test the available permutations of Clark and Word2vec clusters with and without the Brown clusters on the development data. Table 4 provides details of every corpus used to induce the clusters. For example, the first row reads: “Reuters RCV1 was used; the original 63 million words were reduced to 35 million after pre-processing for inducing Brown clusters. Clark and Word2vec clusters were trained on the whole corpus”. The pre-processing and tokenization is performed with the IXA pipes tools (Agerri et al., 2014).

Every evaluation is carried out using the CoNLL NER evaluation script<sup>14</sup>. The results are obtained with the BILOU encoding for every experimental setting except for German CoNLL 2003.

#### 4.1. In-domain evaluation

In this section the results are presented by language. In two cases, Dutch and German, we use two different datasets, making it a total of seven in-domain evaluations.

##### 4.1.1. English

We tested our system in the highly competitive CoNLL 2003 dataset. Table 5 shows that three of our models outperform previous best results reported for English in the CoNLL 2003 dataset (Passos et al., 2014). Note that the best F1 score (91.36) is obtained by adding trigrams and character n-gram features to the best model (91.18). The results also show that these models improve the baseline provided by the local features by around 7 points in F1 score. The most significant gain is in terms of recall, almost 9 points better than the baseline.

We also report very competitive results, only marginally lower than Passos et al. (2014), based on the *stacking* and *combination* of clustering features as described in Section 3.3.4. Thus, both *best cluster* and *comp* models, based on local plus clustering features only, outperform very competitive and more complex systems such as those of Ratinov and Roth (2009) and Turian et al. (2010), and obtain only marginally lower results than Passos et al. (2014). The *stacking* and *combining* effect manifests itself very

---

<sup>13</sup><http://www.newsreader-project.eu>

<sup>14</sup><http://www.cnts.ua.ac.be/conll2002/ner/bin/conllevel.txt>

Features	Development			Test		
	P	R	F1	P	R	F1
Local (L)	93.02	87.75	90.31	87.27	81.32	84.19
L + Brown reuters (BR)	92.83	89.33	91.05	90.28	86.79	88.50
L + Clark wiki 600 (CW600)	93.98	90.58	92.24	90.85	87.16	88.97
L + Word2vec giga 200 (W2VG200)	93.16	89.90	91.45	89.64	85.06	87.29
L + Word2vec wiki 400 (W2VW400)	93.22	90.02	91.59	88.98	85.09	86.99
L + BR + CW600 + W2VW400 ( <i>light</i> )	94.16	91.96	93.04	91.20	89.36	90.27
<i>light</i> + CR600 + W2VG200 ( <i>comp</i> )	94.32	92.22	93.26	91.75	89.64	90.69
<i>comp</i> + BW ( <i>best cluster</i> )	94.21	92.23	93.26	91.67	89.98	90.82
<i>comp</i> + <i>dict</i>	<b>94.60</b>	92.78	93.68	91.86	90.53	<b>91.19</b>
BR+CR600-CW600+W2VG200+ <i>dict</i>	94.58	92.53	93.54	<b>92.20</b>	90.19	<b>91.18</b>
charngram 1:6 + en-91-18	94.56	92.81	93.68	92.16	90.56	<b>91.36</b>
Stanford NER (distsim-conll03)	93.64	92.27	92.95	89.37	87.95	88.65
Illinois NER	-	-	93.50	n/a	n/a	90.57
Turian et al. (2010)	94.11	<b>93.81</b>	93.95	90.10	<b>90.61</b>	90.36
Passos et al. (2014)	-	-	<b>94.46</b>	-	-	90.90

Table 5: CoNLL 2003 English results.

clearly when we compare the single clustering feature models (BR, CW600, W2VG200 and W2VW400) with the *light*, *comp* and *best cluster* models which improve the overall F1 score by 1.30, 1.72 and 1.85 respectively over the best single clustering model (CW600).  
510

It is worth mentioning that our models do not score best in the development data. As the development data is closer in style and genre to the training data (Ratinov and Roth, 2009), this may suggest that our system generalizes better on test data that is not close to the training data; indeed, the results reported in Section 4.3 seem to confirm this hypothesis.  
515

We also compared our results with respect to the best two publicly available English NER systems trained on the same data. We downloaded the Stanford NER system distributed in the 2015-01-30 package. We evaluated their CoNLL model and, while the result is substantially better than their reference paper (Finkel et al., 2005), our clustering models obtain better results. The Illinois NER tagger is used by Ratinov and Roth (2009) and Turian et al. (2010), both of which are outperformed by our system.  
520

#### 4.1.2. German

We tested our system in the GermEval 2014 dataset. Table 6 compares our results with the best two systems (ExB and UKP) by means of the M3 metric, which separately analyzes the performance in terms of the outer and inner named entity spans. Table 6 makes explicit the significant improvements achieved by the clustering features on top of the baseline system, particularly in terms of recall (almost 11 points in the outer level). The official results of our best configuration (*de-cluster-dict*) are reported in Table 7 showing that our system marginally improves the best systems' results on that task (ExB and UKP).  
530

We also compare our system, in the last three rows, with the publicly available GermaNER (Benikova et al., 2015), which reports results for the 4 main outer level entity types (person, location, organization and other). For this experiment we trained the *de-cluster* and *de-cluster + dict* models on the four main classes, improving GermaNER's results by almost 3 F1 points. The GermaNER method of evaluation is interesting  
535



Features	Outer NEs			Inner NEs		
	P	R	F1	P	R	F1
Local (L)	74.64	67.35	70.81	61.30	34.76	44.36
L + Brown wiki (BW)	79.71	73.20	76.31	63.82	37.67	47.37
L + Clark wiki 200 (CW200)	78.86	72.00	75.27	<b>65.49</b>	36.12	46.56
L + Word2vec wiki 200 (W2VW200)	78.00	71.75	74.75	62.62	38.06	47.34
L + Word2vec deWac 100 (W2VWac100)	71.36	71.63	74.38	62.84	36.12	45.87
BW+CW200+W2V(W200+Wac100) (de-cluster)	81.00	75.14	77.96	62.80	40.00	<b>48.87</b>
de-cluster + dict	<b>81.52</b>	75.54	78.42	60.28	41.55	<b>49.20</b>
ExB (Hänig et al., 2014)	80.67	<b>77.55</b>	<b>79.08</b>	45.20	41.17	43.09
UKP (Reimers et al., 2014)	79.90	74.13	76.91	58.74	<b>41.75</b>	48.81
de-4-class-cluster	82.49	75.96	79.09	-	-	-
de-4-class-cluster + dict	82.70	76.44	79.45	-	-	-
GermaNER (4 classes)	82.72	71.19	76.52	-	-	-

Table 6: GermEval 2014 M3 metric results and comparison to GermaNER system on the outer spans.

because allows researchers to directly compare their systems with a publicly available system trained on GermEval data.

Features	Precision	Recall	F1
de-cluster + dict	<b>80.28</b>	72.93	<b>76.43</b>
ExB	78.07	<b>74.75</b>	76.38
UKP	79.54	71.10	75.09

Table 7: GermEval 2014 Official results.

Features	Development			Test		
	P	R	F1	P	R	F1
Local (L)	79.38	55.27	65.16	81.70	59.92	69.14
L + Brown deWac (BWac)	82.12	66.73	73.63	82.26	66.53	73.57
L + Clark deWac 500 (CWac500)	82.40	65.69	73.11	82.76	67.33	74.25
L + Word2vec deWac 100 (W2VWac100)	81.50	63.52	71.40	81.96	66.46	73.41
CWac500 + W2VWac100 (de-cluster)	83.35	68.38	75.13	83.43	68.96	<b>75.51</b>
de-cluster + dict	85.20	<b>70.54</b>	77.18	83.72	<b>70.30</b>	<b>76.42</b>
Florian et al. (2003)	84.60	61.93	71.51	80.19	63.71	72.41
Faruqui and Padó (2010)	<b>86.00</b>	70.00	<b>77.20</b>	<b>86.40</b>	68.50	76.40

Table 8: CoNLL 2003 German results.

Table 8 compares our German CoNLL 2003 results with the best previous work trained on public data. Our best CoNLL 2003 model obtains results similar to the state of the art performance with respect to the best system published up to date (Faruqui et al., 2010) using public data. Faruqui et al. (2010) also report 78.20 F1 with a model trained with Clark clusters induced using the Huge German Corpus (HGC). Unfortunately, the corpus or the induced clusters were not available.

#### 4.1.3. Spanish

The best system up to date on the CoNLL 2002 dataset, originally published by Carreras et al. (2002), is distributed as part of the Freeling library (Padró and Stanilovsky, 2012). Table 9 lists four models that improve over their reported results, almost by 3

points in F1 measure in the case of the *es-cluster* model (with our without trigram and character n-gram features).

Features	Development			Test		
	P	R	F1	P	R	F1
Local (L)	77.78	75.30	76.52	79.49	79.54	79.52
L + Brown periodico (BP)	80.35	78.91	79.62	82.44	82.46	82.45
L + Clark giga 400 (CG400)	81.71	79.27	80.48	81.75	81.82	81.78
L + Clark wiki 400 (CW400)	80.84	78.75	79.78	81.07	81.00	81.03
L + Word2vec giga 400 (W2VG400)	80.04	77.96	78.99	81.56	81.76	81.67
BP+C(W400+G400)+W2VG400 ( <i>es-cluster</i> )	81.87	80.61	81.23	84.18	<b>84.15</b>	<b>84.16</b>
charngram 1:6 + <i>es-cluster</i>	81.95	80.24	81.09	<b>84.27</b>	84.01	84.14
Carreras et al. (2002)	79.15	77.80	78.47	81.38	81.40	81.39

Table 9: CoNLL 2002 Spanish results.

#### 550 4.1.4. Dutch

Despite using clusters from one data source only (see Table 4), results in Table 10 show that our *nl-cluster* model outperforms the best result published on CoNLL 2002 (Clark and Curran, 2003) by 3.83 points in F1 score. Adding the English Illinois NER gazetteers (Ratinov and Roth, 2009) and trigram and character n-gram features increases  
555 the score to 85.04 F1, 5.41 points better than previous published work on this dataset.

Features	Development			Test		
	P	R	F1	P	R	F1
Local (L)	75.66	70.95	73.23	78.97	74.80	76.83
L + Brown wiki (BW)	80.50	76.99	78.70	83.12	79.56	81.32
L + Clark wiki 400 (CW400)	79.44	75.92	77.64	83.18	80.21	81.67
L + Word2vec wiki 100 (W2VW100)	79.28	75.76	77.48	83.11	80.18	81.62
BW+CW400+W2VW100 ( <i>nl-cluster</i> )	82.16	79.20	80.65	84.44	82.49	<b>83.46</b>
<i>nl-cluster</i> + dict	83.63	80.66	82.12	85.92	83.00	<b>84.43</b>
charngram 1:6 + <i>nl-cluster</i>	83.27	80.47	81.84	85.52	82.42	83.94
charngram 1:6 + <i>nl-cluster-dict</i>	84.65	81.57	83.08	<b>86.57</b>	<b>83.56</b>	<b>85.04</b>
Carreras et al. (2002)	76.52	74.82	75.66	77.83	76.29	77.05
Curran and Clark (2003)	-	-	-	79.91	79.35	79.63

Table 10: CoNLL 2002 Dutch results.

We also compared our system with the more recently developed SONAR-1 corpus and the companion NERD system distributed inside its release (Desmet and Hoste, 2014). They report 84.91 F1 for the six main named entity types via 10-fold cross validation. For this comparison we chose the *local*, *nl-cluster* and *nl-cluster-dict* configurations from  
560 Table 10 and run them on SONAR-1 using the same settings. The results reported in Table 11 shows our system’s improvement over previous results on this dataset.

Features	Precision	Recall	F1
Local (L)	86.66	85.57	86.11
<i>nl-cluster</i>	87.89	87.56	87.72
<i>nl-cluster</i> + dict	<b>88.08</b>	<b>87.91</b>	<b>88.00</b>
Sonar-nerd	-	-	84.91

Table 11: SONAR-1 10-fold cross validation results.

#### 4.1.5. Basque

Table 12 reports on the experiments using the *Egunkaria* NER dataset provided by Alegria et al. (2006). Due to the sparsity of the MISC class mentioned in Section 2.1, we decided to train our models on three classes only (location, organization and person). Thus, the results are obtained training our models in the customary manner and evaluating on 3 classes. However, for direct comparison with previous work (Alegria et al., 2006), we also evaluate our best *eu-cluster* model (trained on 3 classes) on 4 classes.

Features	P	R	F1
Local	70.52	60.27	65.00
L + Brown egunkaria (BE)	74.54	67.59	70.90
L + Clark egunkaria 200 (CE200)	76.76	68.92	72.63
L + Clark wiki 200 (CW200)	75.57	65.60	70.23
L + Word2vec egunkaria 300 (W2VE300)	74.04	62.71	67.91
L + Word2vec berria 600 (W2WB600)	74.11	64.82	69.15
BE+C(EW)200+ W2V(E300+B600) ( <i>eu-cluster</i> )	80.66	<b>73.14</b>	<b>76.72</b>
<i>eu-cluster</i> (4 classes)	<b>80.66</b>	70.78	<b>75.40</b>
Alegria et al. (2006)	72.50	70.24	71.35

Table 12: Basque Egunkaria results.

The results show that our *eu-cluster* model clearly improves upon previous work by 4 points in F1 measure (75.40 vs 71.35). These results are particularly interesting as it had been so far assumed that complex linguistic features and language-specific rules were required to perform well for agglutinative languages such as Basque (Alegria et al., 2006). Finally, it is worth noting that the *eu-cluster* model increases the overall F1 score by 11.72 over the baseline, of which 10 points are gained in precision and 13 in terms of recall.

#### 4.2. Reducing training data

So far, we have seen how, given a fixed amount of supervised training data, leveraging unlabeled data using multiple cluster sources helped to obtain state of the art results in seven different in-domain settings for five languages. In this section we will investigate to what extent our system allows to reduce the dependency on supervised training data.

We first use the English CoNLL 2003 dataset for this experiment. The training set consists of around 204K words and we use various smaller versions of it to test the performance of our *best cluster* model reported in Table 5. Table 13 displays the F1 results of the baseline system consisting of local features and the *best cluster* model. The  $\Delta$  column refers to the gains of our *best cluster* model with respect to the baseline model for every portion of the training set.

#Train Words	Local	Clusters	$\Delta$	en-91-18	Illinois NER
1/16	68.80	83.11	14.31	83.27	82.38
1/8	67.21	84.41	17.20	85.38	83.86
1/4	77.75	88.48	10.73	88.60	87.55
1/2	82.67	90.01	7.34	90.06	88.40
Full	84.19	90.68	6.49	91.18	90.57

Table 13: CoNLL 2003 English results reducing training data.

While we have already commented the substantial gains obtained simply by adding our clustering features, it is also interesting to note that the gains are much substantial when less supervised training data is available. Furthermore, it is striking that training our clustering features using only one eighth of the training data (30K words) allows to obtain similar performance to the baseline system trained on the full training set. Equally interesting is the fact that cutting by half the training data only marginally harms the overall performance. Finally, training on just a quarter of the training set (60K) results in a very competitive model when compared with other publicly available NER systems for English trained on the full training set: it roughly matches Stanford NER’s performance, it outperforms models using *external knowledge* or *non-local features* reported by Ratinov and Roth (2009), and also several models reported by Turian et al. (2010), which use one type of word representations on top of the baseline system.

We have also re-trained the Illinois NER system (Ratinov and Roth, 2009) and our best CoNLL 2003 model (*en-91-18*) for comparison. First, we can observe that for every portion of the training set, both our *best cluster* and *en-91-18* model outperform the Illinois NER system. The *best cluster* results are noteworthy because, as opposed to Illinois NER, it does not use gazetteers or global features for extra performance.

#Train	Basque			Dutch			Spanish			German		
	L	C	$\Delta$	L	C	$\Delta$	L	C	$\Delta$	L	C	$\Delta$
1/16	-	-	-	59.46	67.63	8.17	65.07	71.83	6.76	51.31	65.97	14.66
1/8	46.27	62.23	16.96	63.16	72.41	9.25	69.24	74.00	4.76	56.80	67.84	11.04
1/4	52.15	65.10	12.95	71.38	79.25	7.87	73.79	78.25	4.46	61.96	72.20	10.24
1/2	62.13	71.98	9.85	74.00	82.46	8.46	76.87	80.29	3.42	66.43	75.45	9.02
Full	65.00	76.72	11.72	76.83	83.46	6.63	79.52	84.16	4.64	70.81	77.96	7.15

Table 14: Multilingual results reducing training data. Datasets employed: Basque (egunkaria), Dutch and Spanish (CoNLL 2002) and German (GermEval 2014 outer). L: Local model. C: cluster model.  $\Delta$ : difference between them.

These results are mirrored by those obtained for the rest of the languages and datasets. Thus, Table 14 displays, for each language, the F1 results of the baseline system and of the best *cluster* models on top of the baseline.<sup>15</sup> Overall, it confirms that our cluster-based models obtain state of the art results using just one half of the data. Furthermore, using just one quarter of the training data we are able to match results of other publicly available systems for every language, outperforming in some cases, such as Basque, much complex systems of classifiers exploiting linguistic specific rules and features (POS tags, lemmas, semantic information from WordNet, etc.). Considering that Basque is a low-resourced language, it is particularly relevant to be able to reduce as much as possible the amount of gold supervised data required to develop a competitive NERC system.

#### 4.3. Out-of-domain evaluations

NERC systems are often used in out-of-domain settings, namely, to annotate data that greatly differs from the data from which the NERC models were learned. These differences can be of text genre and/or domain, but also because the assumptions of what constitutes a named entity might differ. It is therefore interesting to develop robust

<sup>15</sup>The Basque dataset was far too small to train models with 1/16 of the data.

NERC systems across both domains and datasets. In this section we demonstrate that  
 620 our approach, consisting of basic, general local features and the *combination* and *stacking*  
 of clusters, produces robust NERC systems in three out-of-domain evaluation settings:

- Class disagreements: Named entities are assigned to different classes in training and test.
- Different text genre: The text genre of training and test data differs.
- 625 • Annotation guidelines: The gold annotation of the test data follows different guidelines from the training data. This is usually reflected in different named entity spans.

The datasets and languages chosen for these experiments are based on the availability of both previous results and publicly distributed NERC systems to facilitate direct  
 630 comparison of our system with other approaches. Table 15 specifies the datasets used for each out-of-domain setting and language. Details of each dataset can be found Table 1.

	Class Disagreements		Text Genre		Annotation Guidelines	
	Train	Test	Train	Test	Train	Test
en	CoNLL	MUC 7	CoNLL	Wikigold	CoNLL/Ontonotes/MUC 7	MEANTIME
es	Ancora	CoNLL	-	-	Ancora/CoNLL	MEANTIME
nl	SONAR-1	CoNLL	-	-	SONAR-1	MEANTIME

Table 15: Testsets and languages for out-of-domain evaluations.

#### 4.3.1. Class Disagreements

MUC 7 annotates seven entity types, including four that are not included in CoNLL data: DATE, MONEY, NUMBER and TIME entities. Furthermore, CoNLL includes the  
 635 MISC class, which was absent in MUC 7. This means that there are class disagreements in the gold standard annotation between the training and test datasets. In addition to the four CoNLL classes, SONAR-1 includes PRODUCT and EVENT whereas Ancora also annotates DATE and NUMBER. For example, consider the following sentence of the MUC 7 gold standard (example taken from Ratinov and Roth (2009)):

640 “...baloon, called the Virgin Global Challenger.”

The gold annotation in MUC 7 establishes that there is one named entity:

“...baloon, called [ORG Virgin] Global Challenger.”

However, according to CoNLL 2003 guidelines, the entire name should be annotated like MISC:

645 “...baloon, called [MISC Virgin Global Challenger].”

In this setting some adjustments are made to the NERC systems’ output. Following previous work (Ratinov and Roth, 2009), every named entity that is not LOC, ORG, PER or MISC is labeled as ‘O’. Additionally for MUC 7 every MISC named entity is changed

to ‘O’. For English we used the models reported in Section 4.1.1. For Spanish and Dutch  
 650 we trained our system with the Ancora and SONAR-1 corpora using the configurations  
 described in Sections 4.1.3 and 4.1.4 respectively. Table 16 compares our results with  
 previous approaches: using MUC 7, Turian et al. (2010) provide standard phrase results  
 whereas Ratinov and Roth (2009) score token based F1 results, namely, each token is  
 considered a chunk, instead of considering multi-token spans too. For Spanish we use the  
 655 Stanford NER Spanish model (2015-01-30 version) trained with Ancora. For Dutch we  
 compare our SONAR-1 system with the companion system distributed with the SONAR-  
 1 corpus (Desmet and Hoste, 2014). The results are summarized in Table 16.

muc7			es-conll		nl-conll	
Features	F1	T-F1	Features	F1	Features	F1
Local	71.89	74.53	Local	68.48	Local	57.53
BR	80.06	82.19	BP	70.96	BW	61.53
CR600 + CW600	82.19	83.48	CG400 + CW400	70.64	CW400	61.59
W2VG200	77.12	78.86	W2VG400	72.05	W2VW100	61.67
en-91-18-conll03 (clusters)	83.49	85.35	es-clusters	<b>72.51</b>	nl-clusters	62.90
en-91-18-conll03 + dict	<b>84.86</b>	<b>87.03</b>	es-clusters-dict	71.88	nl-clusters-dict	<b>64.16</b>
Ratinov and Roth/Turian et al.	84.15	86.15	Stanford-ancora	49.92	sonar-nerd	56.67

Table 16: Out-of-domain evaluation based on class disagreements. English models trained on CoNLL 2003; Spanish models trained with Ancora; Dutch models trained with SONAR-1. T-F1: token-based F1.

#### 4.3.2. Text Genre

In this setting the out-of-domain character is given by the differences in text genre  
 660 between the English CoNLL 2003 set and the Wikigold corpus. We compare our system  
 with English models trained on large amounts of silver-standard text (3.5M tokens)  
 automatically created from the Wikipedia (Nothman et al., 2013). They report results  
 on Wikigold showing that they outperformed their own CoNLL 2003 gold-standard model  
 by 10 points in F1 score. We compare their result with our *best cluster* model in Table  
 665 17. While the results of our baseline model confirms theirs, our clustering model score  
 is slightly higher. This result is interesting because it is arguably more simple to induce  
 the clusters we use to train *ixa-pipe-nerc* rather than create the silver standard training  
 set from Wikipedia as described in Nothman et al. (2013).

System	Precision	Recall	Phrase F1
Local	59.01	52.64	55.64
BR+BW	62.58	57.76	60.06
CR600 + CW600	67.79	58.51	63.04
W2VG200 + W2VW400	64.32	58.61	61.39
best-cluster	<b>70.09</b>	64.42	<b>67.14</b>
Stanford NER (distsim-conll03)	64.40	61.89	63.12
en-wiki2 (Nothman et al. 2013)	64.60	<b>68.70</b>	66.60

Table 17: Wikigold out-of-domain evaluation based on text genre.

#### 4.3.3. Annotation Guidelines

670 In this section the objective is studying not so much the differences in textual genre  
 as the influence of substantially different annotation standards. We only use three classes

(location, organization and person) to evaluate the best models presented for in-domain evaluations labeling ‘O’ every entity which is not LOC, ORG or PER.

The text genre of MEANTIME is not that different from CoNLL data. However, differences in the gold standard annotation result in significant disagreements regarding the span of the named entities (Tonelli et al., 2014). For example, the following issues are markedly different with respect to the training data we use for each language:

- Different criteria to decide when a named entity is annotated: in the expression “40 billion US air tanker contract” the MEANTIME gold standard does not mark ‘US’ as location, whereas in the training data this is systematically annotated.
- Mentions including the definite article within the name entity span: ‘the United States’ versus ‘United States’.
- Longer extents containing common nouns: in the MEANTIME corpus there are many entities such as “United States airframer Boeing”, which in this case is considered an organization, whereas in the training data this span will in general consist of two entities: ‘United States’ as location and ‘Boeing’ as organization.
- Common nouns modifying the proper name: ‘Spokeswoman Sandy Angers’ is annotated as a named entity of type PER whereas in the training data used the span of the named entity would usually be ‘Sandy Angers’.

CoNLL NER phrase based evaluation punishes any bracketing error as both false positive and negative. Thus, these span-related disagreements make this setting extremely hard for models trained according to other annotation guidelines, as shown by Table 18. Our baseline models degrade around 40 F1 points and the cluster-based models around 35. Other systems’ results worsen much more, especially for Spanish and Dutch. The token-based scores are in general better but the proportion in performance between systems across languages is similar.

Features	English				Spanish				Dutch			
	Outer		Inner		Outer		Inner		Outer		Inner	
	F1	T-F1	F1	T-F1	F1	T-F1	F1	T-F1	F1	T-F1	F1	T-F1
Local	41.83	54.17	48.57	57.85	34.42	42.95	37.14	41.93	48.49	54.84	49.77	55.86
best-cluster	54.04	65.96	63.72	71.13	56.78	62.55	59.77	63.04	59.94	66.03	60.27	65.42
best-overall	<b>55.48</b>	67.36	<b>64.95</b>	71.98	<b>58.94</b>	65.63	<b>62.14</b>	65.54	<b>63.40</b>	70.68	<b>63.93</b>	70.24
Stanford NER	53.14	64.62	62.45	69.76	46.42	54.40	47.48	54.27	-	-	-	-
Illinois NER	53.24	65.68	62.72	71.04	-	-	-	-	-	-	-	-
Freeling 3.1	-	-	-	-	38.27	48.06	40.93	46.52	-	-	-	-
Sonar nerd	-	-	-	-	-	-	-	-	48.60	53.60	48.44	52.79

Table 18: MEANTIME out-of-domain evaluation. English systems trained on CoNLL data. Dutch systems trained with SONAR-1. Stanford NER Spanish model is trained with Ancora (20150130 version) whereas ixa-pipe-nerc is trained with CoNLL data. T-F1: token-based F1. *Local*: baseline system; *best-clusters*: nl-clusters, es-cluster and en-best-cluster; *best-overall*: best configuration previously presented for each language for the in-domain evaluations.

As an additional experiment, we also tested the English model recommended by Stanford NER which is trained for three classes (LOC, PER, ORG) using a variety of public and (not identified) private corpora (referred to as Stanford NER 3 class (ALL) in

700 Table 19). The results with respect to their CoNLL model improved by around 3 points  
in F1 score across named entity labels and evaluation types (phrase or token based). In  
view of these results, we experimented with multi-corpora training data added to our  
best CoNLL 2003 model (*en-91-18*). Thus, we trained using three public training sets:  
MUC 7, CoNLL 2003 and Ontonotes 4.0. The local model with the three training sets  
705 (Local ALL) improved 12 and 17 points in F1 score across evaluations and entity types,  
outperforming our best model trained only with CoNLL 2003. Adding the clustering  
features gained between 2 and 5 points more surpassing the Stanford NER 3 class multi-  
corpora model in every evaluation. We believe that the main reason to explain these  
improvements is the variety and quantity of annotations provided by Ontonotes (1M  
710 word corpus), and to a lesser extent by MUC 7, which includes some spans containing  
common nouns and determiners making the model slightly more robust regarding the  
mention spans.

Features	Outer NEs		Inner NEs	
	F1	T-F1	F1	T-F1
Local (ALL)	56.00	66.30	65.89	73.01
en-91-18-conll03 (ALL)	<b>62.09</b>	70.98	<b>70.90</b>	77.18
Stanford NER 3 class (ALL)	57.14	70.22	66.96	76.01

Table 19: MEANTIME English multi-corpus out-of-domain evaluation.

## 5. Discussion

715 Despite the simplicity of the *ixa-pipe-nerc* approach, we report best results for En-  
glish in 4 different datasets: for CoNLL 2003 and for the three English out-of-domain  
evaluations. For German we improve the results of the best system in the GermEval  
2014 task and obtain comparable results to previous work in the CoNLL 2003 dataset  
using publicly available data. In Spanish we provide results on CoNLL 2002 and in two  
out-of-domain evaluations clearly outperforming previous best results. For Dutch we im-  
720 prove over previous results in CoNLL 2002 and SONAR-1 data and two out-of-domain  
evaluations. Finally, for Basque (Egunkaria) the improvements are considerable.

*Simple and shallow features.* These results are obtained without linguistic or global fea-  
tures. Instead, injecting unigram knowledge from the *combination* and *stacking* of clus-  
ters allows to obtain a robust NERC system across languages, outperforming other, more  
725 complex (Ratinov and Roth, 2009; Turian et al., 2010; Desmet and Hoste, 2014; Passos  
et al., 2014) and language-specific systems. This is also the case for languages such as  
Basque or German, where the use of linguistic features (lemmas, POS tags, curated suffix  
lists and rules, etc.) has so far been pervasive (Alegria et al., 2006; Benikova et al., 2014,  
2015).

730 *Minimal human intervention.* Each of the datasets used displays an idiosyncratic anno-  
tation and genre. This is even the case for the NER tasks organized at CoNLL 2002 and  
2003: “For instance, Spanish marks no lowercase adjectival nationalities and includes  
192 instances where surrounding quotes are included in the entity annotation; Dutch has



as PER the initials of photographers; and English has lots of financial and sports data  
735 in tables” (Nothman et al., 2013).

In despite of this, our best in-domain results were obtained using the same set of  
features for all seven evaluations, which included trigrams and character n-grams. The  
only variable across datasets and languages was the number of classes of the clustering  
lexicons used.

740 However, the in-domain results also manifest that trigrams and character n-grams  
can be omitted for languages without declension cases or repeated suffixes in the named  
entities (e.g., Dutch, English and Spanish) without it being too detrimental. In fact, we  
started experimenting without trigrams and character n-grams for Dutch, English and  
Spanish. When we added them to the best model of each language (e.g, charngram 1:6  
745 en-91-18 in Table 5), the in-domain results improved or remained quite similar but at  
the cost of making the models less robust in the out-of-domain evaluations. In contrast,  
trigrams and character n-grams were highly beneficial in both in-domain and out-of-  
domain settings for Basque and German.

Our take on this issue is that trigram and character n-gram features would only be  
750 required to address inflected named entities (in Basque) or to learn repeated suffixes  
appearing in named entities and to tackle sparsity (in both Basque and German). For  
example, Table 3 shows the utility of character n-gram features capturing the Basque  
locative declension case *-ko*, which is repeated for many location entities in the training  
data.

755 The emphasis on clustering features for good performance (as opposed to local fea-  
tures) produces an easily exportable and robust system for both in-domain and out-of-  
domain evaluations and across languages. It is therefore crucial, for competitive per-  
formance, to understand which clustering methods and corpora use as well as how to  
combine them effectively.

760 *Choosing the right corpus and clustering method.* Contrary to previous suggestions that  
the larger the number of classes and the corpus used to induced the clusters the better  
(Turian et al., 2010), our results provide a number of interesting pointers to choose the  
appropriate type of corpus and clustering method required for optimal performance.

765 With respect to Brown clusters, all our results are better when we induce 1000 classes.  
We systematically tried for every language and data source with less (320) and more  
(3200) classes without performance improvement. Moreover, in every evaluation setting  
the best results with Brown clusters were obtained when a corpus relatively closed in-  
domain, genre and date was used, even if significantly smaller. This is especially clear  
for Basque, English and Spanish where the best Brown clusters were induced over the  
770 smallest corpora (Egunkaria, Reuters RCV1 and El Periodico, respectively).

In contrast, results show that Word2vec clusters, unlike Brown, always benefit from  
very large amounts of data, regardless of domain or temporal issues. Our experiments  
also suggest that Clark clusters seem to behave more robustly than Brown clusters with  
respect to the size and type of text, performing well with large unrelated and smaller  
775 domain-specific corpora. For best performance, Clark (2003) recommends that the pro-  
portion of clusters  $k$  with respect to the source data should be of  $k^3 \approx n$  where  $n$  is  
the number of words in the corpus. Instead, we systematically induce, for every corpus,  
Clark clusters in the range of 100-600 classes, because preliminary experiments proved  
that over 600 classes, even if the proportion proposed by Clark holds, performance starts

780 to deteriorate<sup>16</sup>. Following this, we are now in better position to address the questions  
posed by Turian et al. (2010):

- Brown clusters benefit from source data closely related to the testset, even if small  
in size.
- Clark clusters behave robustly with respect to the size or type of data sources from  
785 which they are induced.
- For Word2vec clusters size is the most important factor: the larger the corpus the  
better.

Should we prefer certain word features? While Clark features seem to obtain the best  
results overall, our work provides a very simple method of effectively combining them,  
790 depending on the data sources we have available.

*Combination and Stacking.* We use three different data sources, namely, Wikipedia,  
Egunkaria and Berria (see Table 4 for the list of unlabeled corpora used) for the Basque  
experiments. In order to understand better our approach, we annotated the Basque  
testset with every model in Table 12 and manually inspected their output. The following  
795 two examples illustrate how our approach works:

- *Ekudorko*: In addition to the *eu-cluster* model, the Brown model (BE), and the  
Clark Wikipedia model (CW200) provide the correct annotation. The assigned  
clusters in BE and CW200 clustering lexicons clearly consist of locations. For ex-  
800 ample, the 176 cluster of CW200 contains *Gasteizko*, *Arabako*, *Espainiako*, etc.,  
which, unlike *Ekudorko*, do occur in the training set.<sup>17</sup> Most interestingly, while  
*Gasteizko* is only labeled as location in the training set, both *Arabako* and *Espaini-*  
*ako* are labeled as, depending on the context, organization or location.
- *Ameriketara* (to America): Only the Brown model (and the *eu-cluster*) correctly  
labels it as a location. In this case, the 011110011100 Brown path clusters *Amerike-*  
805 *tara* with other locations such as *Baionara* and *Espainiara*, among others, which,  
unlike *Ameriketara*, are contained in the training set.<sup>18</sup>

The same phenomenon can be observed for languages quite different from Basque  
such as English or Spanish. For example, the named entity ‘Uzbekistan’ is not present in  
the English CoNLL 2003 training data, whereas in the test set can be found four times,  
810 all of them locations. The local model annotates all four occurrences as organization  
(see Table 5 for references to models). The Brown and the Word2vec models, two as  
locations and two as organizations, because the cluster companions of ‘Uzbekistan’ are  
of mixed nature. Finally, the Clark model (CW600) does correctly annotate them as  
locations (also *best-cluster*, *en-91-18*, *en-91-36* ...): ‘Uzbekistan’ is placed in the 145

---

<sup>16</sup>Note that we did not experiment with any of the clustering algorithms’ parameters, vector dimen-  
sions, etc, just with the number of classes.

<sup>17</sup>English: in Vitoria-Gasteiz, in Alava, in Spain.

<sup>18</sup>To Bayonne, to Spain.

815 cluster, which contains mostly locations contained in the training data (Spain, Ireland,  
etc.).

Previous approaches to NERC combining clusters or word embeddings have obtained mixed results (Turian et al., 2010). Up until now best results have been based on rather complex systems which also used one type clustering or embedding feature (Passos et al., 820 2014; Ratniov and Roth, 2009; Faruqui et al., 2010; Benikova et al., 2014). In other sequence labeling tasks, Biemann (2009) reports a slight improvement (from 97.33 to 97.43 word accuracy) in POS tagging combining two types of clustering methods (one of them was Clark (2003)) for German.

Our system displays two important differences with respect to previous approaches. 825 First, the differences between our baseline system and the, for example, Clark features are much larger than in previous work (with the exception of Faruqui et al. (2010)), ranging from 2.2 and 5.5 points in F1 measure across the in-domain evaluations to 2-8 points for out-of-domain results. For example, our English CoNLL 2003 single clustering models are similar to the best CoNLL 2003 model distributed by the Stanford NER. If 830 we consider the combined clustering models, the differences over the baseline increase to 5-10 points of F1 measure for in-domain evaluations and between 4-22 in out-of-domain settings.

Second, our combination of clustering features significantly increases the performance over the models using only one type of clustering feature. The improvements range over 835 2 to 6 points in F1 measure for in-domain and out-of-domain results.

In our opinion, these results are quite interesting as previous experiments combining features of different word representations for NERC (Turian et al., 2010), while increasing the overall result, did not improve over the state of the art at the time (Ratniov and Roth, 2009). The results also show that leaning heavily on the clustering features (instead of 840 specific feature tuning) for performance proves very beneficial in out-of-domain settings.

*Robust in out-of-domain settings.* The results of the eight out-of-domain evaluations undertaken suggest that differences regarding named entities spans as described in Section 4.3.3 are harder to overcome than disagreements in text genre (e.g. Section 4.3.2) or entity type (Section 4.3.1). Thus, our method using multiple clustering sources allow to 845 overcome better any differences in named entity type or text genre. However, and even though our system obtains state of the art results in every evaluation, trying to adapt to differences in named entity shape and span proves to be a much more difficult task, hence the comparatively lower results obtained in the MEANTIME evaluations.

*Robust reducing training data.* Koo et al. (2008) present learning curves showing the 850 increase in performance when using Brown clusters for dependency parsing whereas Biemann (2009) provides learning curves to measure the impact of clusters for NERC and chunking. Inspired by those two previous works we measured the performance when training data is reduced. Unlike these two approaches, the differences between adding clusters or not to our system with less training data is huge. Table 14 shows that differences adding the clustering features with half the data is around 8 points in F1 score 855 (for Spanish the difference is 3.42 F1).

Another common point of our clustering features with Koo et al. (2008) is that when gold training data is reduced, the system still obtains competitive results with respect to previous approaches or publicly available systems using only a fraction (half or a quarter)

860 of the data. If we consider the ability of our system to be competitive with substantial  
reductions in gold training data plus the fact that no linguistic motivated features are  
required, we are providing a system which is much cheaper to train for new languages  
and/or domains contributing therefore to alleviate the dependency on gold training data  
to obtain good performing NERC systems for new languages, domains or genres.

## 865 6. Conclusion and Future Work

We have shown how to develop robust NERC systems across languages and datasets  
with minimal human intervention, even for languages with inflected named entities. This  
is based on adequately combining word representation features on top of shallow and  
general local features. Crucially, we have empirically demonstrate how to effectively  
870 combine various types of simple word representation features depending on the source  
data available. This has resulted in a clear methodology for using the three types of  
clustering features which produces very competitive results in both in-domain and out-  
of-domain settings.

Thus, despite the relative simplicity of our approach, we report state of the art results  
875 for Dutch, English, German, Spanish and Basque in seven in-domain evaluations.

We also outperform previous work in eight out-of-domain evaluations, showing that  
our clustering features improve the robustness of NERC systems across datasets. Finally,  
we have measured how much our system’s performance degrades when the amount of  
supervised data is drastically cut. The results show our models are still very competitive  
880 even when reducing the supervised data by half or more. This, together with the lack of  
linguistic features, facilitates the easy and fast development of NERC systems for new  
domains or languages.

In future work we would like to explore more the various types of domain adapta-  
tion required for robust performance across text genres and domains, perhaps including  
885 micro-blog and noisy text such as tweets. Furthermore, we are also planning to adapt  
our techniques to other sequence labeling problems such as Opinion Target Extraction  
(Pontiki et al., 2014, 2015) and Super Sense tagging (Ciaramita and Altun, 2006).

## Acknowledgments

We would like to thank the anonymous reviewers for their comments to improve this  
890 paper. We would also like to thank Sebastian Padó for his help training the Clark clusters.  
This work has been supported by the European projects NewsReader, EC/FP7/316404  
and QTLeap - EC/FP7/610516, and by the Spanish Ministry for Science and Innovation  
(MICINN) SKATER, Grant No. TIN2012-38584-C06-01 and TUNER, TIN2015-65308-  
C5-1-R.

## 895 References

- Aggeri, R., Bermudez, J., Rigau, G., 2014. IXA pipeline: Efficient and ready to use multilingual NLP  
tools, in: Proceedings of the Ninth International Conference on Language Resources and Evaluation  
(LREC’14), Reykjavik, Iceland. pp. 3823–3828.
- Ahn, D., 2006. The stages of event extraction, in: Proceedings of the Workshop on Annotating and  
900 Reasoning about Time and Events, Association for Computational Linguistics. pp. 1–8.

- Al-Onaizan, Y., Knight, K., 2002. Translating named entities using monolingual and bilingual resources, in: Proceedings of the 40th Annual Meeting on Association for Computational Linguistics (ACL 2002), pp. 400–408.
- Alegria, I., Arregi, O., Ezeiza, N., Fernández, I., 2006. Lessons from the development of a named entity recognizer for Basque. *Procesamiento del lenguaje natural* 36, 25–37.
- 905 Babych, B., Hartley, A., 2003. Improving machine translation quality with automatic named entity recognition, in: Proceedings of the 7th International EAMT workshop on MT and other Language Technology Tools, pp. 1–8.
- Baroni, M., Bernardini, S., Ferraresi, A., Zanchetta, E., 2009. The wacky wide web: a collection of very large linguistically processed web-crawled corpora. *Language resources and evaluation* 43, 209–226.
- 910 Benikova, D., Biemann, C., Kisselew, M., Padó, S., 2014. GermEval 2014 named entity recognition shared task: Companion paper, in: Proceedings of the GermEval 2014 Named Entity Recognition Shared Task, KONVENS 2014, pp. 104–113.
- Benikova, D., Yimam, S.M., Santhanam, P., Biemann, C., 2015. Germaner: Free open german named entity recognition tool, in: Proceedings of the International Conference of the German Society for Computational Linguistics and Language Technology (GSCL-2015), pp. 31–38.
- 915 Biemann, C., 2009. Unsupervised part-of-speech tagging in the large. *Research on Language and Computation* 7, 101–135.
- Brown, P.F., Desouza, P.V., Mercer, R.L., Pietra, V.J.D., Lai, J.C., 1992. Class-based n-gram models of natural language. *Computational linguistics* 18, 467–479.
- 920 Cambria, E., Schuller, B., Xia, Y., Havasi, C., 2013. New avenues in opinion mining and sentiment analysis. *IEEE Intelligent Systems* 28, 15–21.
- Carreras, X., Marquez, L., Padro, L., 2002. Named entity extraction using AdaBoost, in: Proceedings of the 6th conference on Natural language learning-Volume 20, pp. 1–4.
- 925 Chinchor, N., Marsh, E., 1998. Muc-7 information extraction task definition, in: Proceeding of the Seventh Message Understanding Conference (MUC-7), Appendices.
- Ciaramita, M., Altun, Y., 2006. Broad-coverage sense disambiguation and information extraction with a supersense sequence tagger, in: Proceedings of the 2006 Conference on Empirical Methods in Natural Language Processing, Association for Computational Linguistics. pp. 594–602.
- 930 Clark, A., 2003. Combining distributional and morphological information for part of speech induction, in: Proceedings of the tenth conference on European chapter of the Association for Computational Linguistics-Volume 1, Association for Computational Linguistics. pp. 59–66.
- Clark, S., Curran, J., 2003. Language Independent NER using a Maximum Entropy Tagger, in: Proceedings of the Seventh Conference on Natural Language Learning (CoNLL-03), Edmonton, Canada. pp. 164–167.
- 935 Collins, M., 2002. Discriminative training methods for hidden markov models: Theory and experiments with perceptron algorithms, in: Proceedings of the ACL-02 conference on Empirical methods in natural language processing-Volume 10, pp. 1–8.
- Collobert, R., Weston, J., 2008. A unified architecture for natural language processing: Deep neural networks with multitask learning, in: Proceedings of the 25th international conference on Machine learning, ACM. pp. 160–167.
- 940 Cucerzan, S., 2007. Large-scale named entity disambiguation based on wikipedia data, in: Proceedings of EMNLP-CoNLL, pp. 708–716.
- Cybulska, A., Vossen, P., 2013. Semantic relations between events and their time, locations and participants for event coreference resolution, in: Proceedings of the International Conference Recent Advances in Natural Language Processing RANLP 2013, Hissar, Bulgaria. pp. 156–163.
- 945 Desmet, B., Hoste, V., 2014. Fine-grained dutch named entity recognition. *Language resources and evaluation* 48, 307–343.
- Doddington, G.R., Mitchell, A., Przybocki, M.A., Ramshaw, L.A., Strassel, S., Weischedel, R.M., 2004. The automatic content extraction (ace) program-tasks, data, and evaluation., in: LREC, pp. 837–840.
- 950 Faruqui, M., Padó, S., Sprachverarbeitung, M., 2010. Training and evaluating a german named entity recognizer with semantic generalization, in: Proceedings of KONVENS, pp. 129–133.
- Finkel, J.R., Grenager, T., Manning, C., 2005. Incorporating non-local information into information extraction systems by gibbs sampling, in: Proceedings of the 43rd Annual Meeting on Association for Computational Linguistics, pp. 363–370.
- 955 Florian, R., Ittycheriah, A., Jing, H., Zhang, T., 2003. Named entity recognition through classifier combination, in: Daelemans, W., Osborne, M. (Eds.), Proceedings of CoNLL-2003, Edmonton, Canada. pp. 168–171.
- Hachey, B., Radford, W., Nothman, J., Honnibal, M., Curran, J.R., 2013. Evaluating entity linking with

- wikipedia. Artificial intelligence 194, 130–150.
- 960 Han, X., Sun, L., 2011. A generative entity-mention model for linking entities with knowledge base, in: Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies-Volume 1, pp. 945–954.
- Hänig, C., Bordag, S., Thomas, S., 2014. Modular classifier ensemble architecture for named entity 965 recognition on low resource systems. Proceedings of the KONVENS Germ-Eval Shared Task on Named Entity Recognition, Hildesheim, Germany .
- Hoffart, J., Yosef, M., Bordino, I., Frstenau, H., Pinkal, M., Spaniol, M., Taneva, B., Thater, S., Weikum, G., 2011. Robust disambiguation of named entities in text, in: Proc. of EMNLP, pp. 27–31.
- Hong, Y., Zhang, J., Ma, B., Yao, J., Zhou, G., Zhu, Q., 2011. Using cross-entity inference to improve 970 event extraction, in: Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies-Volume 1, pp. 1127–1136.
- Ji, H., Grishman, R., 2008. Refining event extraction through cross-document inference., in: ACL, pp. 254–262.
- Ji, H., Grishman, R., 2011. Knowledge base population: Successful approaches and challenges, in: 975 Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies-Volume 1, Association for Computational Linguistics. pp. 1148–1158.
- Koehn, P., Hoang, H., Birch, A., Callison-Burch, C., Federico, M., Bertoldi, N., Cowan, B., Shen, W., Moran, C., Zens, R., et al., 2007. Moses: Open source toolkit for statistical machine translation, in: Proceedings of the 45th annual meeting of the ACL on interactive poster and demonstration sessions, Association for Computational Linguistics. pp. 177–180.
- 980 Koo, T., Carreras, X., Collins, M., 2008. Simple semi-supervised dependency parsing, in: Proceedings of ACL-08: HLT, Association for Computational Linguistics, Columbus, Ohio. pp. 595–603.
- Li, H., Zheng, J., Ji, H., Li, Q., Wang, W., 2013. Name-aware machine translation., in: ACL (1), pp. 604–614.
- 985 Liang, P., 2005. Semi-supervised learning for natural language. Ph.D. thesis. Massachusetts Institute of Technology.
- Liu, B., 2012. Sentiment analysis and opinion mining. Synthesis Lectures on Human Language Technologies 5, 1–167.
- Mendes, P.N., Daiber, J., Jakob, M., Bizer, C., 2011. Evaluating DBpedia Spotlight for the TAC-KBP 990 entity linking task, in: Proceedings of the TAC-KBP 2011 Workshop, pp. 118–120.
- Mikolov, T., Sutskever, I., Chen, K., Corrado, G.S., Dean, J., 2013. Distributed representations of words and phrases and their compositionality, in: Advances in Neural Information Processing Systems, pp. 3111–3119.
- Miller, S., Guinness, J., Zamanian, A., 2004. Name tagging with word clusters and discriminative 995 training., in: HLT-NAACL, pp. 337–342.
- Minard, A.L., Speranza, M., Agirre, E., Aldabe, I., van Erp, M., Magnini, B., Rigau, G., Urizar, R., 2015. Semeval-2015 task 4: Timeline: Cross-document event ordering, in: Proceedings of the 9th International Workshop on Semantic Evaluation (SemEval 2015), Association for Computational Linguistics, Denver, Colorado. pp. 778–786.
- 1000 Minard, A.L., Speranza, M., Urizar, R., Altuna, B., van Erp, M., Schoen, A., van Son, C., 2016. MEANTIME, the NewsReader Multilingual Event and Time Corpus, in: Proceedings of LREC 2016.
- Mnih, A., Hinton, G., 2007. Three new graphical models for statistical language modelling, in: Proceedings of the 24th international conference on Machine learning, ACM. pp. 641–648.
- Nadeau, D., Sekine, S., 2007. A survey of named entity recognition and classification. *Lingvisticae* 1005 *Investigationes* 30, 3–26.
- Nobata, C., Collier, N., Tsujii, J., 2000. Comparison between tagged corpora for the named entity task, in: Proceedings of the workshop on Comparing corpora, Association for Computational Linguistics. pp. 20–27.
- Nothman, J., Ringland, N., Radford, W., Murphy, T., Curran, J.R., 2013. Learning multilingual named 1010 entity recognition from wikipedia. Artificial Intelligence 194, 151–175.
- Padró, L., Stanilovsky, E., 2012. Freeling 3.0: Towards wider multilinguality, in: Calzolari, N., Choukri, K., Declerck, T., Doğan, M.U., Maegaard, B., Mariani, J., Odijk, J., Piperidis, S. (Eds.), Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC-2012), European Language Resources Association (ELRA), Istanbul, Turkey. pp. 2473–2479.
- 1015 Passos, A., Kumar, V., McCallum, A., 2014. Lexicon infused phrase embeddings for named entity resolution, in: Proceedings of the Eighteenth Conference on Computational Natural Language Learning, Association for Computational Linguistics, Ann Arbor, Michigan. pp. 78–86.
- Pontiki, M., Galanis, D., Papageorgiou, H., Manandhar, S., Androutsopoulos, I., 2015. Semeval-2015

- task 12: Aspect based sentiment analysis, in: Proceedings of the 9th International Workshop on Semantic Evaluation (SemEval 2015), Association for Computational Linguistics, Denver, Colorado. pp. 486–495.
- 1020 Pontiki, M., Papageorgiou, H., Galanis, D., Androutsopoulos, I., Pavlopoulos, J., Manandhar, S., 2014. Semeval-2014 task 4: Aspect based sentiment analysis, in: Proceedings of the 8th International Workshop on Semantic Evaluation (SemEval 2014), pp. 27–35.
- 1025 Pradhan, S., Moschitti, A., Xue, N., Uryupina, O., Zhang, Y., 2012. CoNLL-2012 shared task: Modeling multilingual unrestricted coreference in OntoNotes, in: Proceedings of the Sixteenth Conference on Computational Natural Language Learning (CoNLL 2012), Jeju, Korea. pp. 1–40.
- Ratinov, L., Roth, D., 2009. Design challenges and misconceptions in named entity recognition, in: Proceedings of the Thirteenth Conference on Computational Natural Language Learning, pp. 147–155.
- 1030 Reimers, N., Ecker-Köhler, J., Schnober, C., Kim, J., Gurevych, I., 2014. Nested named entity recognition with neural networks. Proceedings of the KONVENS Germ-Eval Shared Task on Named Entity Recognition, Hildesheim, Germany .
- Ritter, A., Clark, S., Etzioni, O., 2011. Named entity recognition in tweets: an experimental study, in: Proceedings of the Conference on Empirical Methods in Natural Language Processing, pp. 1524–1534.
- 1035 Suzuki, J., Isozaki, H., 2008. Semi-supervised sequential labeling and segmentation using giga-word scale unlabeled data, in: Proceedings of ACL-08: HLT, Association for Computational Linguistics, Columbus, Ohio. pp. 665–673.
- Taulé, M., Martí, M.A., Recasens, M., 2008. AnCora: Multilevel Annotated Corpora for Catalan and Spanish., in: Proceedings of LREC 2008, pp. 96–101.
- 1040 Tjong Kim Sang, E.F., 2002. Introduction to the CoNLL-2002 shared task: Language-independent named entity recognition, in: Proceedings of CoNLL-2002, Taipei, Taiwan. pp. 155–158.
- Tjong Kim Sang, E.F., De Meulder, F., 2003. Introduction to the CoNLL-2003 shared task: Language-independent named entity recognition, in: Proceedings of the seventh conference on Natural language learning at HLT-NAACL 2003-Volume 4, pp. 142–147.
- 1045 Tonelli, S., Sprugnoli, R., Speranza, M., Minard, A.L., 2014. NewsReader Guidelines for Annotation at Document Level. Technical Report. Fondazione Bruno Kessler.
- Turian, J., Ratinov, L.A., Bengio, Y., 2010. Word representations: A simple and general method for semi-supervised learning, in: Proceedings of the 48th Annual Meeting of the Association for Computational Linguistics, Association for Computational Linguistics, Uppsala, Sweden. pp. 384–394.
- 1050 Zhang, T., Johnson, D., 2003. A robust risk minimization based named entity recognition system, in: Proceedings of the seventh conference on Natural language learning at HLT-NAACL 2003-Volume 4, Association for Computational Linguistics. pp. 204–207.